

纖薄堅固 卓越的視覺體驗 戶外商用顯示器 55"/49" XE4F



XE4F 採用纖薄堅固的設計，安裝容易。即使在強烈的陽光直射下，高亮度的顯示器亦能緊抓客戶目光。

纖薄堅固的設計

纖薄輕巧 容易安裝



輕鬆整合 滿足客製化設計需求



卓越的視覺體驗

4000nits 絕佳亮度



完美寬廣視角



卓越的視覺體驗

持久亮度



佩戴太陽眼鏡也清晰可見



戶外使用首選

IP56 防塵防水 安全設計



防護玻璃 (IK10 認證)



輕鬆維護

支援 HDBaseT™ 操控便利



即時網路遠端監控





纖薄堅固 卓越的視覺體驗

戶外商用顯示器 55"/49" XE4F

使用情境



Dimensions (unit : mm)

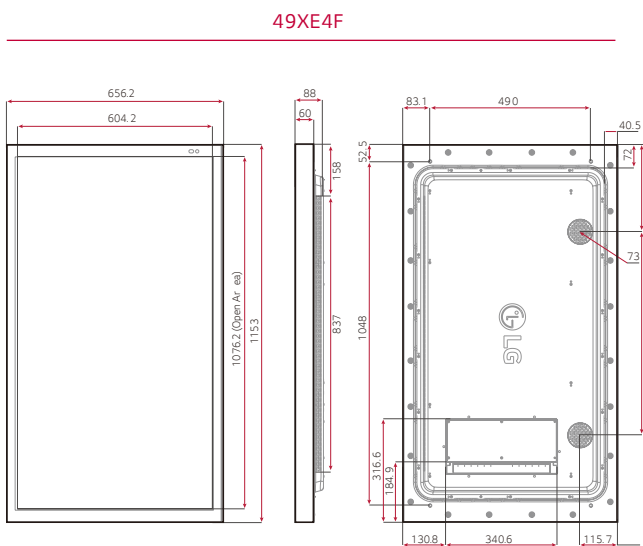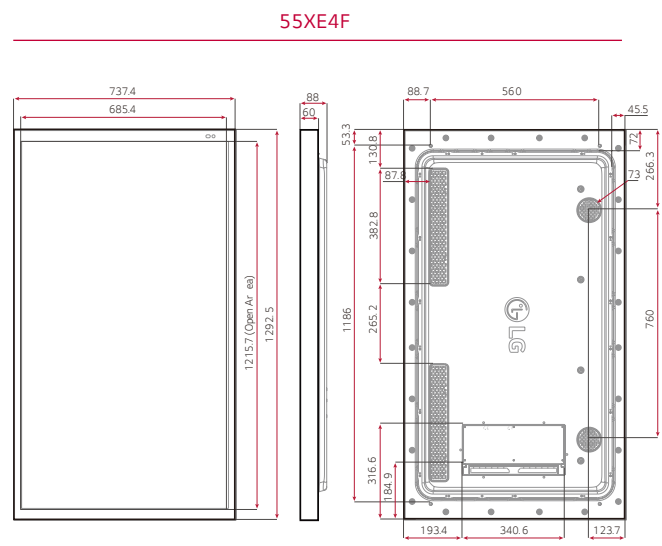

XE4F Series		55XE4F	49XE4F
PANEL	Screen Size	55	49
	Panel Technology	IPS, M+(WRGB)	IPS, M+(WRGB)
	Back Light Type	Direct	Direct
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 x 1,080 (FHD, WRGB)	1,920 x 1,080 (FHD, WRGB)
	Brightness	4,000 cd/m² (Typ.), 3,200 cd/m² (Min.)	4,000 cd/m² (Typ.), 3,200 cd/m² (Min.)
	Contrast Ratio	1,200:1	1,300:1
	Dynamic CR	500,000:1	500,000:1
	Viewing Angle (H x V)	178 x 178	178 x 178
	Response Time	Typ. 9ms (G to G BW)	Typ. 8ms (G to G BW)
	Surface Treatment (Haze, Quarter Wave Plate)	Haze 3%, QWP	Haze 3%, QWP
	Local dimming	48 Blocks	48 Blocks
	Life Time (Typ.)	50,000 Hrs	50,000 Hrs
	Operation Hours	24 Hrs	24 Hrs
PANEL	Orientation	Portrait & Landscape	Portrait & Landscape
	Input	HDMI(2), DP, HDBaseT, USB(2)	
	Output	External Speaker Out(L/R)	
PHYSICAL SPECIFICATION	External Control	RS232C In/Out, RJ45(LAN) In/Out	
	Protection Glass	5mm(IK 10, Degree of Protection, Tempered,Anti-Reflective)	5mm(IK 10, Degree of Protection, Tempered,Anti-Reflective)
	Bezel Color	Black	Black
	Bezel Width	38.4mm(T/B), 26.0mm(L/R)	38.4mm(T/B), 26.0mm(L/R)
	Monitor Dimension (W x H x D)	737.4 x 1,292.5 x 88.0mm	656.2 x 1153x 88.0mm
	Weight (Head)	40kg	32Kg (TBD)
	Packing Dimensions (W x H x D)	1,446 x 890 x 207 mm	1,286 x 797 x 207mm
	Packed Weight	45kg	37Kg (TBD)
	Handle	X	X
	KEY FEATURE	webOS4.0 Platform, Internal Memory(16G, System 4GB+ Available 12GB) Temperature Sensor, Auto Brightness sensor, BLU Sensor, Pixel sensor, Gyro Sensor, Humidity Sensor Outdoor API control, HDBaseT, WOL, webRTC, Control Manager, DPM, Smart Energy Saving	
ENVIRONMENT CONDITIONS	Operation Temperature	-30°C to 50 °C	-30°C to 50 °C
	Operation Humidity	5 % to 100 %	5 % to 100 %
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
POWER CONSUMPTION	Typ./Max.	310/390W	290/370W
	Smart Energy Saving	170W	170W
CERTIFICATION	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC
	ErP / Energy Star	ErP "C" /NA	ErP "C" /NA
SOFTWARE COMPATIBILITY	SuperSign	Yes(CMS, Control)	Yes(CMS, Control)
	Signage365Care	Yes	Yes
ACCESSORY	Basic	Remote Controller, Manual(EIG, IG, OM), Regulation Book, Phone to RS232C Gender, HDMI Cable , POWER CABLE, Battery	