




*圖片均僅為示意


UHD 顯示器 UL3J-B


LG webOS UHD 顯示器



 Ultra HD 解析度的超高畫質

 優雅的窄邊框設計

 搭載webOS 6.0 高效能表現

 支援各種感應器連接

 可搭配 **LG One:Quick** Share

 兼容 AV 控制系統

UL3J-B


尺寸 86" / 75" / 65" / 55" / 50" / 43"

螢幕解析度 3,840 × 2,160 (UHD)

建議運作時長 16 Hours / 7 Days


亮度 86" / 75" : 330 nits
65" / 55" / 50" : 400 nits
43" : 300 nits

可搭配的 LG Solution LG One:Quick Share, LG ConnectedCare, LG SuperSign CMS/Control, Promota App*

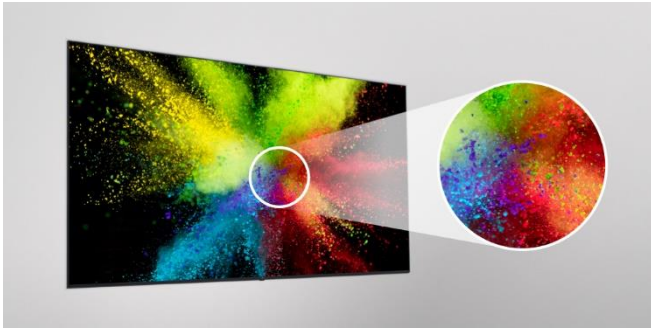

Ultra HD 解析度的完美畫質

UHD 解析度呈現的畫質，讓內容的色彩和細節栩栩如生，使用IPS 面板有寬廣的視角，可提供清晰的內容。

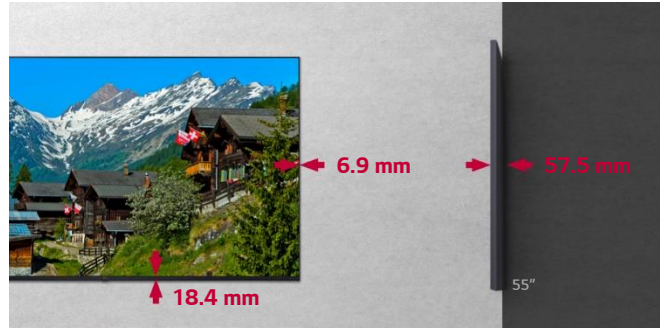

精緻的纖薄設計

本系列的邊框尺寸和厚度纖薄*，可節省空間並方便安裝，並呈現精緻的設計，增添產品擺放空間的美感。



搭載 LG webOS 6.0 的高效能

LG webOS 6.0 在 SoC* 和 web 引擎上已升級，可配合本 UL3J 系列上使用，順暢執行多項排播工作。LG webOS 智慧顯示器平台直覺式的 GUI 讓使用者均可便利操作。**

* SoC：單晶片系統

** GUI：圖形使用者介面



可搭配各種感應器應用

LG webOS 智慧顯示器平台透過 USB 外接裝置，利用輕鬆支援與外接感應器的連線，例如 GPIO、NFC/RFID、溫度感應器等，輕鬆提供加值解決方案。

* 例如根據天氣變化，提供店內訪客特定的促銷資訊

** 外接感應器需要另行購買並測試與 webOS 平台的相容性。



LG 的簡單廣告助手 Promota

使用可在行動裝置下載的 LG Promota* 應用程式，您可以輕鬆創作顯示內容。使用 Promota，您可以新增文字和影像，為您的企業創作線上檔案，並提供您的客戶如活動新聞、季節性菜單、促銷等資訊，同時推薦與您的產業相關且方便使用的範本。

* LG Promota 可從 App Store 和 Google Play 商店下載。（不適用歐洲/CIS 地區）



LG 的無線螢幕共享解決方案 LG One:Quick Share

LG One:Quick Share 是一種無線螢幕共享解決方案，可透過 UL3J 系列、USB 傳輸單元及其應用程式使用。您可以透過 USB 加密工具按鈕和嵌入式 Wi-Fi*，將個人 PC 螢幕輕鬆共享到顯示螢幕，且無需使用遙控器即可調整連接顯示螢幕的基本設定值（音量、影像模式、自動亮度等）。此外，辦公會議模式** 可幫助您在會議開始前顯示議程、注意事項。


- * 使用者需要在顯示器的網路菜單中設定啟用 Soft AP。
- ** 使用者可以在顯示器的 EZ 設定菜單中啟用辦公會議模式。
- *** LG One : Quick Share 需要另行購買。



與 AV 控制系統相容

UL3J 系列已支援 CrestronConnected®* 認證，與專業 AV 控制器的相容性更高，可進行完美的整合和自動化控制**，提升業務管理效率。

- * Crestron Connected® 相容性需從顯示螢幕進行初始設定。
- ** 網路控制

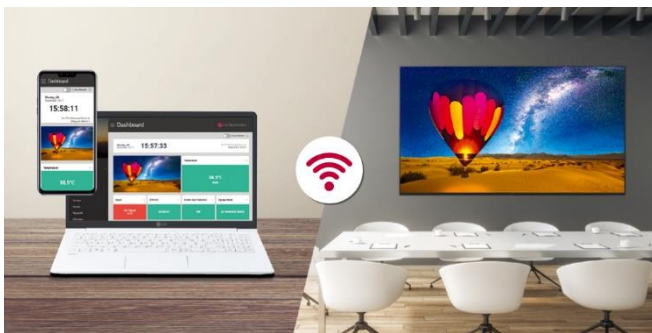

遠距監控


此網路式監控解決方案，方便使用者輕鬆使用。讓使用者隨時隨地在可使用網路的環境下，從手機和 PC 完整存取，且可存取目前和之前的資料。讓使用者可即時遠端監控組件、進行調整和控制組件。



與視訊會議系統相容

為了進行有效的視訊會議，UL3J 系列支援與 Cisco 解決方案的相容性，為更智慧的視訊會議提供強大的整合控制功能*。

- * 使用 HDMI 纜線連接（HDMI 纜線為選購項目）

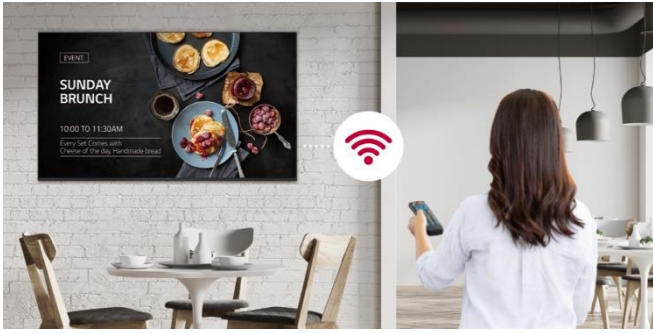

輕鬆內容發布和 SW 更新

UL3J 系列內建嵌入式 Wi-Fi，可輕鬆在同一網路下無線發布內容和更新韌體。



無線存取點

UL3J 系列可作為虛擬路由器使用，可以是行動裝置的無線存取點。



內建喇叭

內容將透過內建喇叭的音效而更豐富，無需購買或安裝外接喇叭。



即時 LG ConnectedCare 服務


使用 LG 服務提供的可選雲端服務解決方案 LG ConnectedCare*，可更輕鬆且更快速進行維護。遠端管理客戶工作場所顯示螢幕的狀態，以進行故障診斷和遠端控制服務，支援客戶業務的穩定進行。

*「LG ConnectedCare」服務的可用性因地區而異，需另行購買。因此，請聯絡所在地區的 LG 銷售代表，了解更多詳細資訊。


CONNECTIVITY

86"

Rear

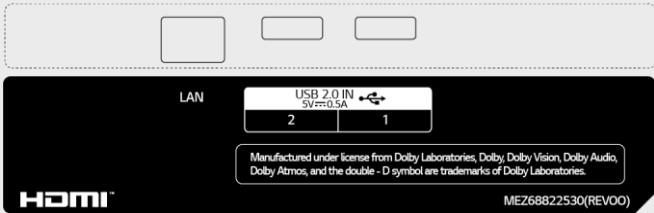


Side

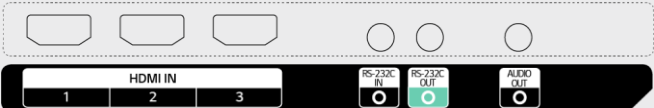


75" / 65" / 55" / 50" / 43"

Rear

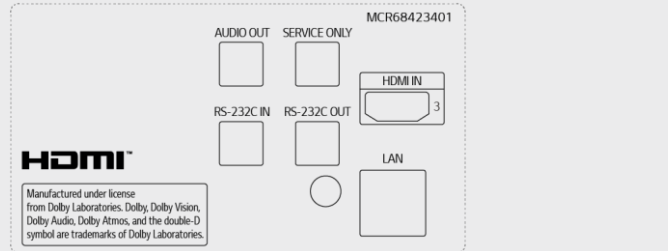

Side

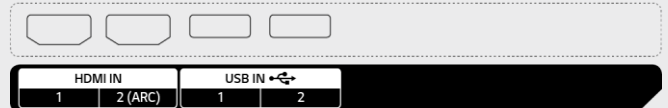

*尺寸 & 插口版與上方圖示可能有些微差異，請在下單訂購前聯繫 LG 業務確認

SPECIFICATIONS

UL3J-B

	86UL3J-B	75UL3J-B	65UL3J-B	55UL3J-B	50UL3J-B	43UL3J-B	
Panel	Screen Size	86"	75"	65"	55"	50"	43"
	Panel Technology	IPS	IPS	IPS	IPS	IPS	IPS
	Back Light Type	Direct	Direct	Direct	Direct	Direct	Direct
	Aspect Ratio	16 : 9	16 : 9	16 : 9	16 : 9	16 : 9	16 : 9
	Native Resolution	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)
	Refresh Rate	120 Hz	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
	Brightness	330 nit (Typ.)	330 nit (Typ.)	400 nit (Typ.)	400 nit (Typ.)	400 nit (Typ.)	300 nit (Typ.)
	Contrast Ratio	1,200 : 1	1,200 : 1	1,200 : 1	1,300 : 1	1,200 : 1	1,300 : 1
	Dynamic CR	1,000,000 : 1	1,000,000 : 1	1,000,000 : 1	1,000,000 : 1	1,000,000 : 1	1,000,000 : 1
	Color Gamut	DCI 80%	DCI 80%	DCI 80%	DCI 80%	DCI 80%	DCI 80%
	Viewing Angle (H × V)	178 × 178	178 × 178	178 × 178	178 × 178	178 × 178	178 × 178
	Color Depth	1.07 Billion Colors (Advanced 8 bit)	1.07 Billion Colors (8bit + FRC)	1.07 Billion Colors (8bit + FRC)	1.07 Billion Colors (10 bit)	1.07 Billion Colors (10 bit (D))	1.07 Billion Colors (10 bit (D))
	Response Time	5 ms (G to G)	8 ms (G to G)	8 ms (G to G)	8 ms (G to G)	12 ms (G to G)	8 ms (G to G)
	Surface Treatment (Haze)	3%	1%	1%	3%	3%	3%
	Life time	30,000 Hrs (Min.)	30,000 Hrs (Min.)	30,000 Hrs (Min.)	30,000 Hrs (Min.)	30,000 Hrs (Min.)	30,000 Hrs (Min.)
	Operation Hours (Hours/Day)	16 / 7	16 / 7	16 / 7	16 / 7	16 / 7	16 / 7
	Portrait / Landscape	No / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes
Connectivity	Input	HDMI (3, HDCP 2.2/1.4), RS-232C In (4 Pin Phone-jack), RJ45 (LAN), USB 2.0 (2, Type A)					
	Output	Audio Out, RS-232C Out (4 Pin Phone-jack)					
Mechanical Specification	Bezel Color	Ashed Blue	Ashed Blue	Ashed Blue	Ashed Blue	Ashed Blue	Ashed Blue
	Bezel Width	Off : 6.9 mm (T/R/L), 18.4 mm (B) On : 15.9 mm (T/R/L), 19.9 mm (B)	Off : 7.9 mm (T/R/L), 18.4 mm (B) On : 13.9 mm (T/R/L), 19.9 mm (B)	Off : 6.8 mm (T/R/L), 18.4 mm (B) On : 12.8 mm (T/R/L), 19.9 mm (B)	Off : 6.9 mm (T/R/L), 18.4 mm (B) On : 12.8 mm (T/R/L), 19.9 mm (B)	Off : 7.3 mm (T/R/L), 18.4 mm (B) On : 12.8 mm (T/R/L), 19.9 mm (B)	Off : 6.9 mm (T/R/L), 18.4 mm (B) On : 12.8 mm (T/R/L), 19.9 mm (B)
	Weight (Head)	45.2 kg	31.4 kg	21.5 kg	14.0 kg	11.7 kg	8.8 kg
	Packed Weight	57.7 kg	40.3 kg	27.5 kg	18.8 kg	14.4 kg	10.9 kg
	Monitor Dimension (W×H×D)	1,927 × 1,104 × 59.9 mm	1,678 × 964 × 59.9 mm	1,454 × 838 × 57.7 mm	1,235 × 715 × 57.5 mm	1,121 × 651 × 57.1 mm	967 × 564 × 57.1 mm
	Carton Dimensions (W×H×D) (Box Outer Size)	2,115 × 1,215 × 228 mm	1,820 × 1,115 × 200 mm	1,600 × 970 × 172 mm	1,360 × 810 × 162 mm	1,215 × 775 × 152 mm	1,055 × 660 × 142 mm
	VESA™ Standard Mount Interface	600 × 400 mm	400 × 400 mm	300 × 300 mm	300 × 300 mm	200 × 200 mm	200 × 200 mm
Key Feature	Internal Memory 8 GB, Built-in Wi-Fi, Sensor (Temperature Sensor, Auto Brightness Sensor), Local Key Operation (Power On/Off Only), webOS 6.0, Embedded CMS (Local Contents Scheduling, Group Manager), USB Plug & Play, Fail Over, Background Image (Booting Logo Image, No Signal Image), Sync Mode (RS-232C Sync, Local Network Sync), Screen Share, Video Tag (4, Max One HDMI Input), Play via URL, Rotation (Screen Rotation, External Input Rotation), Gapless Playback, Setting Data Cloning, SNMP, ISM (Image Sticking Minimization) Method, Auto Set ID, Status Mailing, Control Manager, 3 rd Party Compatibility (Cisco Certi (TBD, Oct-), Crestron Connected, Power (Smart Energy Saving, PM Mode, Wake on LAN, Network Ready), Beacon, HDMI-CEC ¹⁾ , SI Sever Setting, webRTC, Proddiom						
Environment Conditions	Operation Temperature	0°C to 40°C (Portrait Scene: 0°C to 30°C)	0°C to 40°C (Portrait Scene: 0°C to 35°C)	0°C to 40°C (Portrait Scene: 0°C to 35°C)	0°C to 40°C (Portrait Scene: 0°C to 35°C)	0°C to 40°C (Portrait Scene: 0°C to 35°C)	0°C to 40°C (Portrait Scene: 0°C to 35°C)
	Operation Humidity	10% to 80%	10% to 80%	10% to 80%	10% to 80%	10% to 80%	10% to 80%
Power	Power Supply	AC 100-240V~, 50/60Hz	AC 100-240 V~, 50/60Hz	AC 100-240 V~, 50/60 Hz	AC 100-240 V~, 50/60 Hz	AC 100-240 V~, 50/60 Hz	AC 100-240V~, 50/60Hz
	Power Type	Built-in Power	Built-in Power	Built-in Power	Built-in Power	Built-in Power	Built-in Power
Power Consumption	Typ. / Max.	220 W / 300 W	155 W / 220 W	130 W / 187 W	105 W / 160 W	105 W / 150 W	80 W / 120 W
	BTU (British Thermal Unit)	751 BTU/Hr (Typ.), 1,024 BTU/Hr (Max.)	529 BTU/Hr (Typ.), 751 BTU/Hr (Max.)	444 BTU/Hr (Typ.), 638 BTU/Hr (Max.)	358 BTU/Hr (Typ.), 546 BTU/Hr (Max.)	358 BTU/Hr (Typ.), 512 BTU/Hr (Max.)	273 BTU/Hr (Typ.), 409 BTU/Hr (Max.)
	Smart Energy Saving	154 W	108.5 W	91 W	73.5 W	66 W	56 W
	DPM	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W
	Power off	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W
Sound	Speaker	Yes	Yes	Yes	Yes	Yes	Yes
Certification	Safety	CB / NRTL	CB	CB	CB	CB	CB
	EMC	FCC Class "A" / CE	FCC Class "A" / CE	FCC Class "A" / CE	FCC Class "A" / CE	FCC Class "A" / CE	FCC Class "A" / CE
	ErP / Energy Star	Yes (OldErP for Jordan) / No	Yes (OldErP for Jordan) / Yes	Yes (OldErP for Jordan) / Yes	Yes (OldErP for Jordan) / Yes	Yes (OldErP for Jordan) / Yes	Yes (OldErP for Jordan) / No
Software Compatibility	SuperSign CMS, SuperSign Control / Control+, SuperSign WB, SuperSign Media Editor, Promota (Not Available for EU/CIS), LG ConnectedCare ²⁾						
Language	English, French, German, Spanish, Italian, Korean, Chinese (Simplified), Chinese (Original), Portugues (Brazil), Swedish, Finnish, Norwegian, Danish, Russian, Japanese, Portugues (Europe), Dutch, Czech, Greek, Turkish, Arabic, Polski						
Accessory	Basic	Remote Controller, Power Cord, Regulation Book, Phone to D-Sub9 Gender, Cable Holder					

1) Compatibility may differ by equipment.
2) The availability can differ by region.

*規格如有變動恕不另行通知，詳細使用方式請見使用手冊



Download
LG C-Display+
Mobile App
Google Play Store

www.lg.com/global/business/information-display
www.youtube.com/c/LGCommercialDisplay
www.facebook.com/LGInformationDisplay
www.linkedin.com/company/lginformationdisplay
twitter.com/LG_ID_HQ

LG may make changes to specifications and product descriptions without notice. Copyright © 2022 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. The names of products and brands mentioned here may be the trademarks of their respective owners.

